

Tech-Light I320

PR-TL1320

LED LIGHTING BALLOON
132 000 LUMENS



LED
★★★★



CE



LIGHTING DATA

• Open core area lighting requirement (EN 1838 standard) *	6 500 m ²
• Very low risk area lighting requirement for safety and security (EN 12464-2)	1 963 m ²
• Light under the balloon (4 m high) **	704 lx
• Maximum lumen	132 000 lm
• Colour temperature : daylight	5 000 K
• CRI	70

* Standard envelope

** Lenticular envelope

TECHNICAL DATA

• Light Engine LED	24 x 5 500 lm
• Average LED life*	50 000 h
• Power consumption	920W
• Efficiency	143 lm/W 14 042 lm/kg
• Available voltage	100-240 VAC 50-60 Hz
• Power supply	main power or 2 kVA generator
• Envelopes options	différentes options
• Wind resistance of the balloon	100 km/h
• Flame-retardant fabric	

* Under normal conditions of use

www.prolutech.com




DIMENSIONS & PACKAGING

• Envelope size	ø 110 cm
• Net weight of the balloon	9,4 kg
• P530 stand height	from 1,60 to 5,70 m
• Transport bag	L 108 x l 30 x h 30 cm
• Transport gross weight	less of 16,5 kg
• Content : full set lighting balloon, 1 standard envelope, 1 power cord (9m/30 ft), 1 quick-start guide, 1 envelope repair patch kit.	

Stand and sandbags optional.

TECHNOLOGY

• Certifications	IEC-60598-1, CE, IP54
------------------	--------------------------

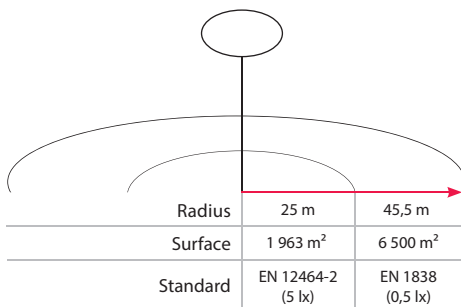

Ballon éclairant LED
LED lighting balloon

Prolutech
31 allée des Thomasses
74540 Alby-sur-Chéran
France

+33 (4) 50 46 80 81
info@prolutech.com
www.prolutech.com



PROLUTECH
VOUS ECLAIRER, NOTRE METIER