


# Tech-Light 650

PR-TL650



LED LIGHTING BALOON  
65 000 LUMENS

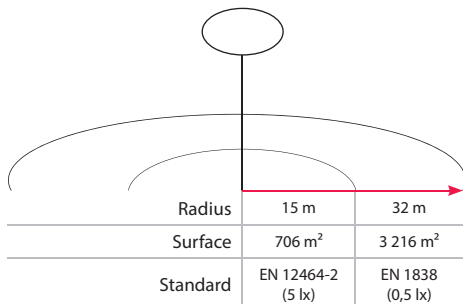

LED  
★★★★



CE

## LIGHTING DATA

• Open core area lighting requirement (EN 1838 standard) *	3 216 m <sup>2</sup>
• Very low risk area lighting requirement for safety and security (EN 12464-2)	706 m <sup>2</sup>
• Light under the balloon (4 m high) **	452 lx
• Maximum lumen	65 000 lm
• Colour temperature : daylight	5 000 K
• CRI	70

\* Standard envelope

\*\* Lenticular envelope

## TECHNICAL DATA

• Light Engine LED	12 x 5 500 lm
• Average LED life*	50 000 h
• Power consumption	500 W
• Efficiency	132 lm/W
	10 153 lm/kg
• Available voltage	100-240 VAC
	50-60 Hz
• Power supply	main power or 1 kVA generator
• Envelopes options	multiple options
• Wind resistance of the balloon	100 km/h
• Flame-retardant fabric	

\* Under normal conditions of use

## DIMENSIONS & PACKAGING

• Envelope size	110 cm
• Net weight of the balloon	6,5 kg
• P530 stand height	from 1,60 to 5,70 m
• Transport bag	L 86 x w 30 x h 30 cm
• Transport gross weight	less than 13 kg
• Content : full set lighting balloon, 1 user manual, 1 envelope repair patch kit.	
Stand and sandbags optional.	

## TECHNOLOGY

• Certifications	IEC-60598-1, CE, IP54
------------------	--------------------------

www.prolutech.com

Ballon éclairant LED  
LED lighting balloon

Prolutech  
31 allée des Thomasses  
74540 Alby-sur-Chéran  
France

+33 (4) 50 46 80 81  
info@prolutech.com  
www.prolutech.com



**PROLUTECH**  
VOUS ECLAIRER, NOTRE METIER